



Projectors | arrayLED 30 W 840 mA | CRI 80
97325N85



Optika : 8*-50* (Regulējama)



Technical data	
Installation position	Wall lights - Ceiling - Floor
Installation environment	Outdoor
Light Source	LED
Optics	Adjustable
Power	30 W
Luminous flux (source)	3945 lm
Current intensity	840mA
CCT / Tonalità	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Energy class	A++
Safety class	3
IP	IP67
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Driver included	No
Induzione	No
Emergency mode	No
Directional	Yes
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	Yes

Finishing casing	
Material	Aluminium
Colour	black RAL 9005
Processing	Coating
Electronics	
 On/Off Driver 180~300V AC	99269

Projectors | arrayLED 30 W 840 mA | CRI 80
97325N85

Single emission projectors for outdoor application. The natural white LED light source with a adjustable light distribution is composed of 1 arrayed LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 3945 lm, with a 131.5 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a black ral 9005 finish, processed by means of coating. The ingress protection degree is IP67; the total weight is of 1.92 kg. The power supply driver is not provided and is to be ordered separately.


The total absorbed power is 30 W. The power supply cable is included and features.

The device features protection class III and can be wall lights, ceiling or floor-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	92 %
Luminous flux (source)	3945 lm
Luminaire luminous flux	3633 lm
Consumption	30 W
Luminaire efficacy	121 lm/W
Colour temperature	4000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	80 Ra

UGR	
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 19
UGR axial	< 19

OPTICAL	
Light distribution simmetry	Symmetrical
Ottica C0/C180	15°

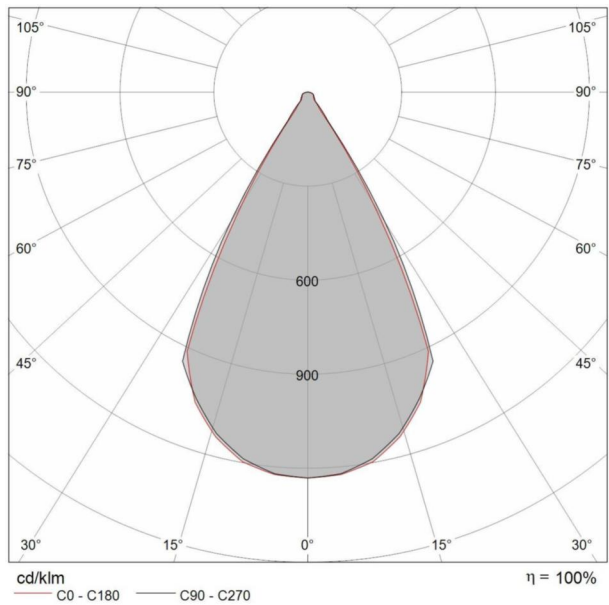



Iris67-3 | Projectors | Accessories
97325N85



Pegs

Code
84890



Pegs

Code
98112